Shrink tunnel

Siroco 50

Olsen & Kael

"Order in motion"



Siroco hot-air shrink tunnels deliver high performance to improve the presentation of all kinds of products.

Features
/Funkcje

- Designed to integrate easily into packaging lines and work with different film types.
- Various belt options (rollers, stainless steel mesh or Teflon) ensuring unrestricted airflow and uniform heat transfer to shrink the film.



type (second skin)
/wygląd (druga skóra)

Insulation for uniform shrinking
/Izolacja dla równomiernego obkurczania


Adjustable conveying and temperature
/Regulowany transport i temperatura

Data table /Tabela danych

Values in mm (H × W × L) and kg; exceptions marked (x)

	45	50	60
Height	910	1300	1830
Width	1000	770	940
Length	1300	1930	4050
Voltage (v/hz)	350/50	350/50	350/50
Compatible film		PE, PVC	
Max. product size	400x200	450x250	450x330
Power (kW)	9-11	14-16	25-27
Conveyor speed (m/min)	0-12	0-33	0-14
Weight	190-200	400-420	590-620

Specifications /Dane techniczne

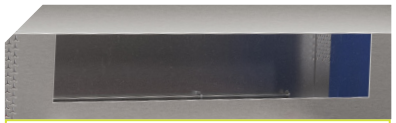

Viewing window
/Okno podglądu




Adjustable legs or wheels
/Regulowane nóżki lub kółka

Choice of finishes /Wykończenia




Carbon steel | **Stainless steel**


Drawings /Rysunki produktu

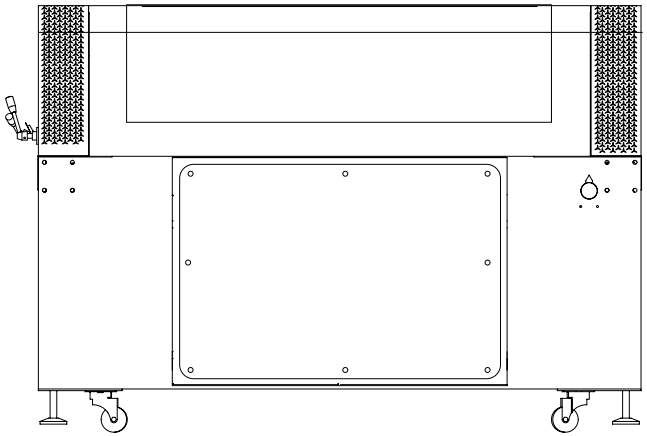

Front /Przód

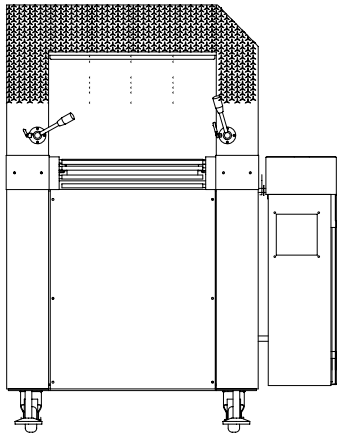

Side /Bok

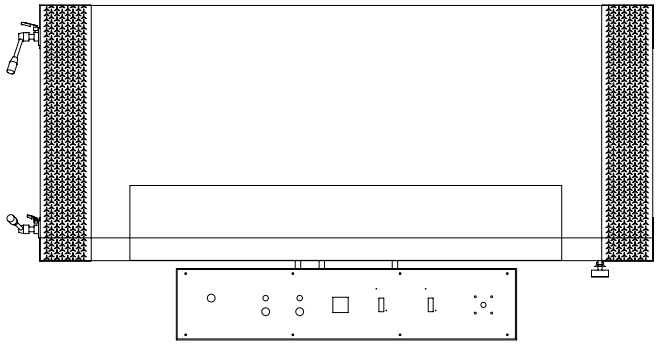

Top /Góra