Tray sealer

Vesta 300

Olsen & Kael

"Order in motion"



Automatic tray feeding
/Automat. podajnik tacek

Automatic film rewinder
/Automatyczny nawijak folii



vacuum (MAP)
/próżnia (MAP)

Semi-automatic industrial tray sealer for professional food packaging in trays with heat-sealable film.

Features
/Funkcje


- Works with modified atmosphere (MAP), vacuum and inert gas, ensuring longer preservation and better product presentation.
- Designed for medium-scale production, it offers versatility, uniform sealing, perimeter film cutting and all safety systems.

Data table /Tabela danych


Values in mm (H × W × L) and kg; exceptions marked (x)

	300	400	500
Height (mm)	1575	1655	1655
Width (mm)	630	1140	1245
Length (mm)	1010	1335	1440
Weight (kg)	150-170	635-705	715-790
Max. film width (mm)	300-320	430-450	530-550
Max. film roll diameter (mm)	210-230	290-310	
Cycles per minute	3-4	3-5	
Max. tray size (mm)	380x260	450x400	550x600
Gas replacement rate (%)		98-99,5%	
Gas dosing accuracy (%)		±2%	
Voltage (v/hz)	380/50	380/50-220/60	
Air pressure (MPa)	0.6~0.8	0.5~0.6	

Drawings /Rysunki produktu

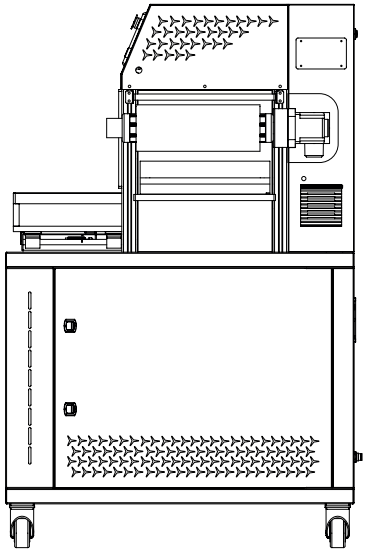

Front /Przód

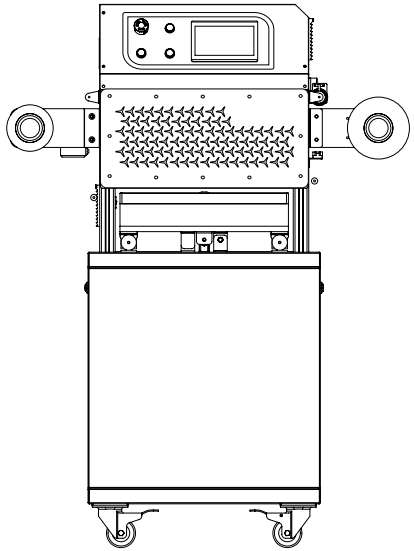

Side /Bok


Specifications /Dane techniczne

SMC pneumatics
/Pneumatyka SMC

Schneider electronics
/Elektronika Schneider

Busch pump
/Pompa próżniowa Busch


Touch screen
/ekran dotykowy

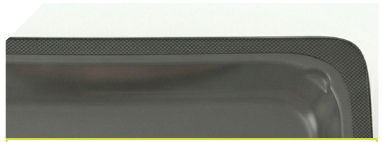

Perimeter cut
/Cięcie obwodowe



Gas injection
/Wtrysk gazu

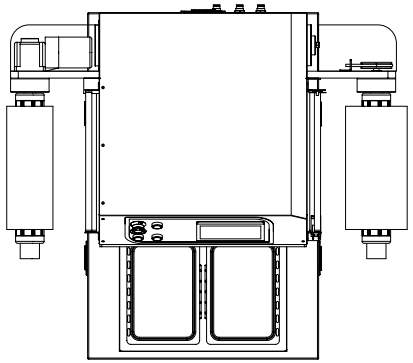

Top /Góra

For further technical details, see the website shown on the right. Images, descriptions and technical specifications in this document are indicative and may change without notice. This information is not a contractual commitment or binding offer. Official distributor in Poland: Bałtyk Maszyny.